

# 1N5400 - 1N5408

**PRV : 50 - 1000 Volts**

**Io : 3.0 Amperes**

## FEATURES :


- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop

## MECHANICAL DATA :

- \* Case : DO-201AD Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.929 grams

## SILICON RECTIFIER DIODES

### DO - 201AD

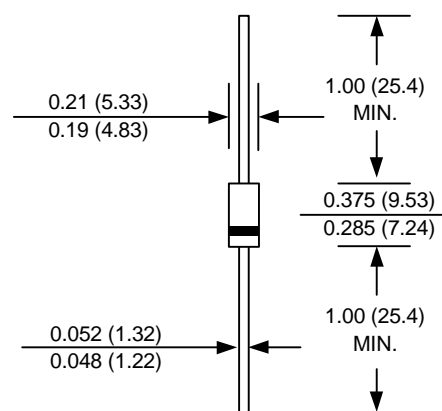

Dimensions in inches and ( millimeters )

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	1N5400	1N5401	1N5402	1N5404	1N5406	1N5407	1N5408	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length $T_a = 75^\circ\text{C}$	$I_F$	3.0							A
Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	200							A
Maximum Forward Voltage at $I_F = 3.0$ Amps.	$V_F$	0.95							V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$	$I_R$	5.0							$\mu\text{A}$
at rated DC Blocking Voltage $T_a = 100^\circ\text{C}$	$I_{R(H)}$	50							$\mu\text{A}$
Typical Junction Capacitance (Note1)	$C_J$	28							pF
Typical Thermal Resistance (Note2)	$R_{\theta JA}$	15							$^\circ\text{C/W}$
Junction Temperature Range	$T_J$	- 65 to + 175							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	- 65 to + 175							$^\circ\text{C}$


### Notes :

(1) Measured at 1.0 MHz and applied reverse voltage of 4.0V<sub>DC</sub>


(2) Thermal resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounted.

## RATING AND CHARACTERISTIC CURVES ( 1N5400 - 1N5408 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

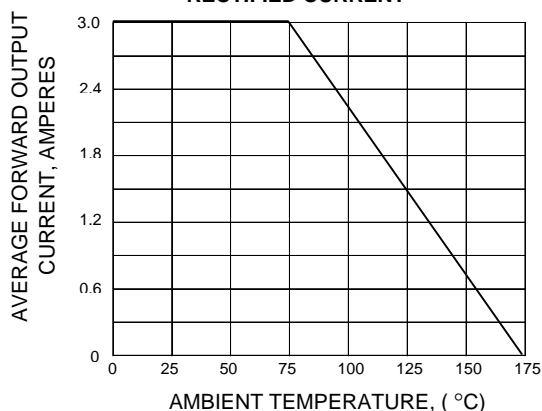


**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

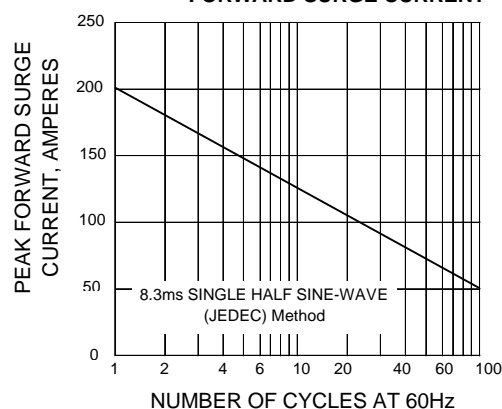

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

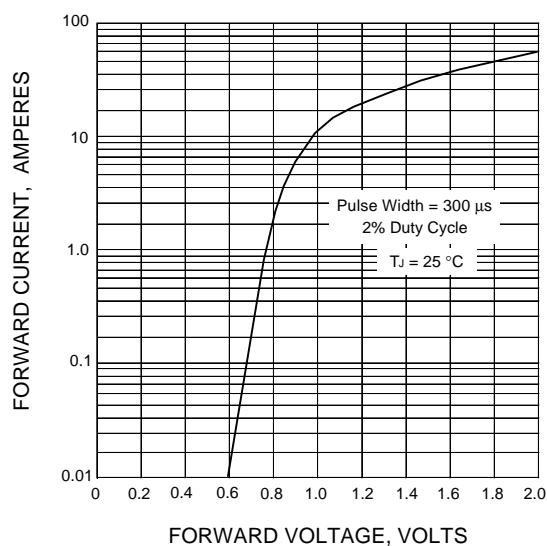

**FIG 4 . - TYPICAL JUNCTION CAPACITANCE**

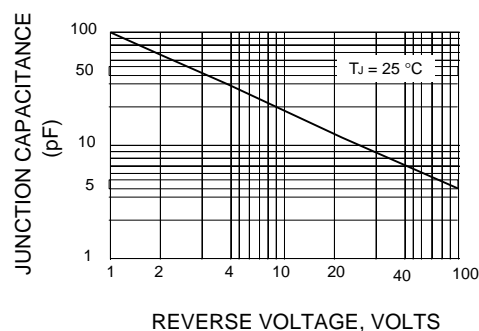

**FIG. 5 - TYPICAL REVERSE CHARACTERISTICS**

